

PU/183 – New From REGO Products!

Hose End Valve Adapter 7576

PU/183

Application


No gas flow is allowed when this adapter is not connected to the 1 3/4" ACME connection on a filler valve. It also acts as a back check for filler valves that won't seal off.

Features

- Designed to be installed on the outlet connection of LP- Gas hose end valve; no flow is allowed until the 7576 adapter female connection is engaged on the male ACME threads on the filler valve.
- Incorporates a back check that will stop flow out of a filler valve that fails to close, when the 7576 adapter remains connected to the filler valve.
- Bleeder valve is designed to vent gas between the hose end valve connection and the 7576 hose end adapter.
- Long grip ACME swivel for ease in connecting and disconnection from a filler valve connection.

Materials

Body	Brass
Inlet Connection	Brass
Outlet Connection	Brass
ACME Swivel	Aluminum
Spring	Stainless Steel
Seat Disc	Synthetic Rubber
O-Rings	Synthetic Rubber

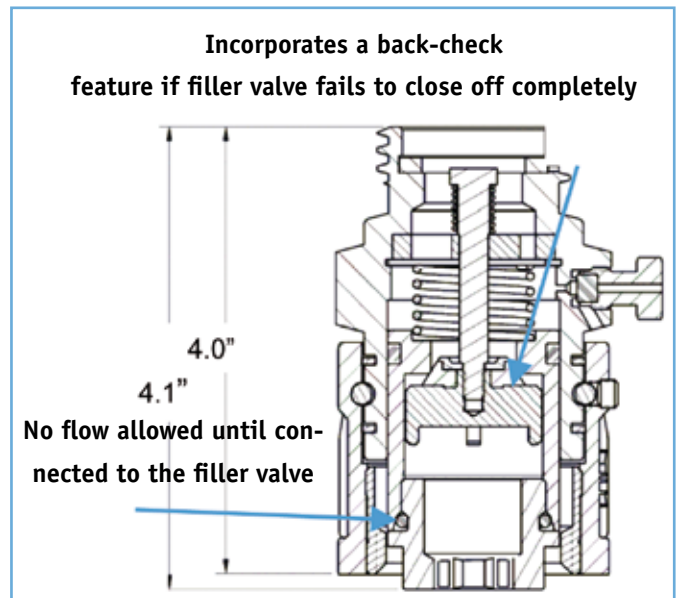

Ordering Information

Part Number	Vent Valve	Filler Connection	Hose End Valve Connection	Propane Liquid Capacity @ 80 PSID
7576	Yes	1-3/4" F.ACME	1-3/4" M.ACME	57 GPM

PU 183 1/23/08



REGO GmbH - Distribution Center Europe
 Industriestrasse 9, D-35075 Gladenbach, Germany
 Phone +49 (0)6462-9147-0, Fax -9147-29
 info@rego-europe.de · www.rego-europe.de